

World's Leading Manufacturer Of Fibreglass Whip Antennas



SPECIALISTS FOR AM BROADCASTING

85 ft Fibreglass Free-standing Antenna V33085AM-CL2


The Valcom Model V33085AM-CL2 is a heavy-duty, field-proven, high-reliability, coil-loaded, 85 foot, free standing whip antenna for AM broadcasting use.

The V33085AM-CL2 is designed to meet the FCC requirements for AM broadcasting antennas for all class C stations and any class B or class D stations operating at or above 1200 kHz.

As well, the V33085AM-CL2 is ideally suited for use as an STA or a backup antenna for all AM stations.

FEATURES:

- FCC APPROVABLE ABOVE 1200 KHZ
- HIGH EFFICIENCY
- LOW COST INSTALLATION
- LOW COST MAINTENANCE
- HIGH STRENGTH FILAMENT WOUND
- SELF-SUPPORTING ANTENNA
- NO OBSTRUCTION LIGHTING REQUIRED

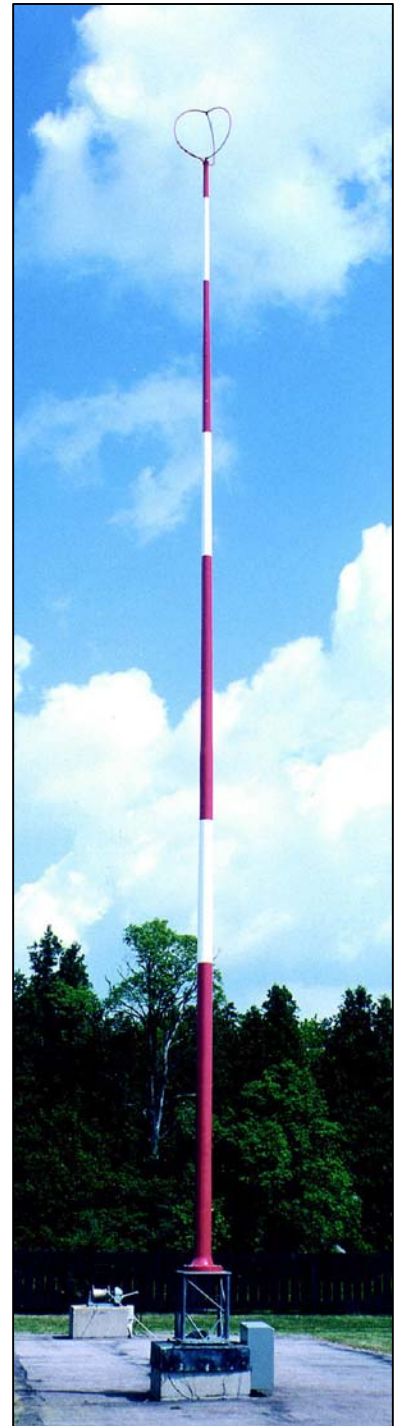

V33085AM-CL2

QUICK REFERENCE DATA

ELECTRICAL CHARACTERISTICS

RESONANT FREQUENCY (f_0)	540 - 1700 KHZ (SPECIFIED BY CUST)
POWER RATING	2 KW FOR FREQ OF 540 - 790 KHZ
	4 KW FOR FREQ OF 800 - 1090 KHZ
	6 KW FOR FREQ OF 1100 - 1390 KHZ
	10 KW FOR FREQ OF 1400 - 1700 KHZ
DRY WITHSTANDING VOLTAGE	30 KV
ELECTRICAL LENGTH	DEPENDANT ON f_0
POSITION OF LOADING COIL	2ND SECTION
OPERATING FREQUENCY	SPECIFIED BY CUSTOMER
INPUT IMPEDANCE AT f_0	DEPENDANT ON f_0
Q AT OPERATING FREQUENCY	DEPENDANT ON f_0

MECHANICAL CHARACTERISTICS

MECHANICAL LENGTH	85 FT (25.9 M)
VALCOSPHERE	32 IN (81.3 CM) DIA
ANTENNA MATERIAL	FILAMENT WOUND EPOXY/FIBREGLASS
TOP TERMINATION	VALCOSPHERE
JOINTS	BRONZE FERRULE C/W LOCKING PIN
WIND LOADING TEST	170 MPH (272 KPH)
TEMPERATURE	-60°F TO 150°F (-50°C TO 65°C)
FINISH	EPOXY POLYAMIDE PAINT
COLOUR	WHITE, OTHER COLOURS AVAILABLE
WEIGHT	950 LBS (432 KG) MAX

NOTES:

1. THE ADVANTAGE OF A CENTRE LOADING COIL IS A REDUCED RESONANCE OVER THAT OF A STRAIGHT 1/4-WAVE WHIP WHICH REDUCES BASE FEED IMPEDANCE AND VOLTAGE, THEREFORE PROVIDING AND GREATER POWER HANDLING CAPABILITY.
2. DO NOT USE LEAD BASE PAINT TO TOUCH-UP OR REPAINT ANTENNA.

