

World's Leading Manufacturer Of Fibreglass Whip Antennas



SPECIALISTS FOR VERY HIGH FREQUENCY


VAS-121.5 Antenna System

ELECTRICAL

FREQUENCY RANGE	120-125 MHz
RADIATION PATTERN	OMNIDIRECTIONAL +/- 1dB
GAIN	0 dBd
VSWR	2:1 MAXIMUM
POLARIZATION	VERTICAL
POWER HANDLING	150 WATT AVERAGE
CONNECTOR	N-TYPE

MECHANICAL

WEIGHT	5 LBS (2.3 KG)
HEIGHT	48 INCHES (1.2 M)
TEMPERATURE	-60°F TO +160°F (-51°C TO +71°C)
FINISH	HAZE GREY SILICONE ALKYD ENAMEL
VIBRATION	MIL-STD-167, TYPE I
SHOCK	MIL-S-901C, GRADE A
ICE LOADING	1/2 INCH (13 MM) RADIAL
MOUNTING	4X Ø0.453 IN (11.50 MM) EQUASPACED ON A Ø4.50 IN (114.3 MM) BOLT CIRCLE

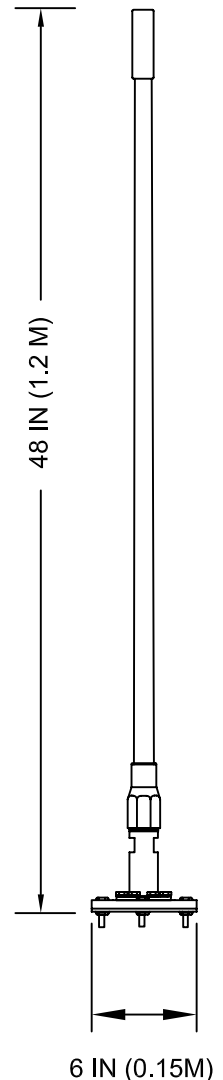

P.O. BOX 603 GUELPH, ONTARIO, CANADA, N1H 6L3
TEL 519-824-3220 FAX 519-824-3411
INTERNET: www.valcom-guelph.com EMAIL: enquiries@valcom-guelph.com